



LET PATZ HANDLE YOUR MANURE SO YOU DON'T HAVE TO!

Work smarter. Not harder!

INVESTMENT FLEXIBILITY

Ask Dealer for Financing Details

IntelliShuttle® Box Scraper

CABLE BOX SCRAPER



For slurry manure with chopped straw, sawdust or sand-laden bedding.

Features Sentinel Control Panel with universal language icon navigation.

Drive unit design includes technology for precise scraper automation!

Shuttle box features AR400 (abrasion-resisting) steel bottom plates for longer life.

Mechanically activated swinging door.

Cross gutter:

Width: 36 inches (914 mm).

Depth: Minimum 34 inches (864 mm).

Drive can be installed in any position with up to 5 shuttle boxes per drive unit.

End wheel is designed for mounting on end \underline{or} can be adapted to side walls for easy removal and service.



Side Wall Mount Wheel



End Wall Mount Wheel



NEW! SENTINEL CONTROL PANEL

- Patz innovative "Learning System."
- · Fiberglass NEMA enclosure with easy-to-use, quick-connect electric cables with pre-wired junction box.
- Glove-friendly, easy-to-use, 7" (178 mm) color HMI touch screen display.



IntelliShuttle® II Box Scraper

CHAIN BOX SCRAPER



Chain Carrier

For slurry manure with chopped straw, sawdust or sand-laden bedding.

Features Sentinel Control Panel with universal language icon navigation.

Drive unit design includes technology for precise scraper automation!

Shuttle box features AR400 (abrasion-resisting) steel bottom plates for longer life.

Mechanically activated swinging door.



Width: 36 inches (914 mm).

Depth: Minimum 34 inches (864 mm).


Drive can be installed on an end mount or inline mount with up to 5 shuttle boxes per drive unit. (See photo below of inline mount example)

End wheel is designed for mounting on end \underline{or} can be adapted to side walls for easy removal and service.



End Wall Mount Wheel

- Large, easy-to-recognize universal language icon navigation.
- 3 operational modes: MANual, CONTinuous, and AUTOmatic (schedule up to 12 cycles per day).
- Adjustable speed control.
- · "Auxiliary Relay Function" allows the operator to automatically start another machine, lights, or horns by supplying a start signal.

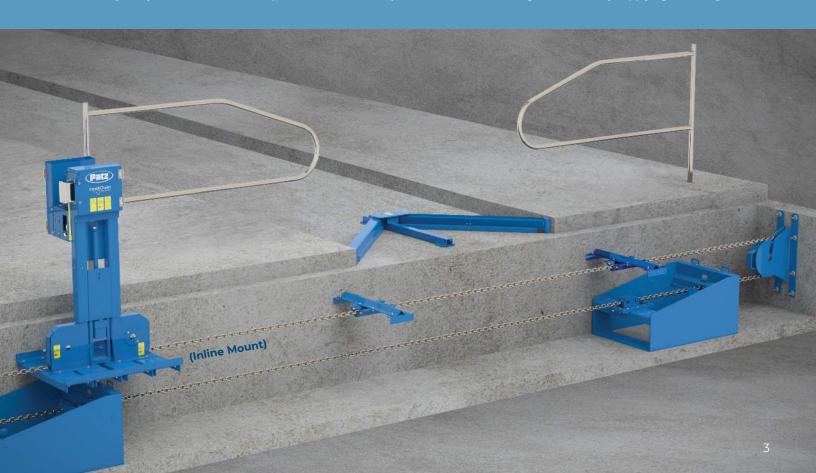





Patz Corporation • Pound, Wisconsin USA
Ph: (920) 897-2251 • info@patzcorp.com • www.patzcorp.com



PA-26732 8/21 ©2021 Patz Corporation Printed in U.S.A.